


### Products in Family


GRH1333UL/4GB (1 x 4GB 2Rx8 DIMM)

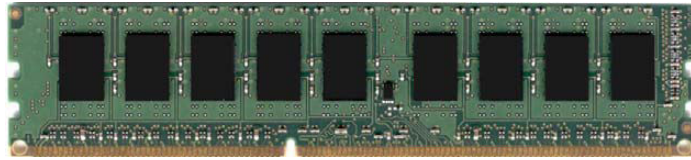

Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35 V ±0.075 Fully RoHS Compliant		Each GRH1333UL upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	HP Product	Supported in these HP systems:
GRH1333UL/4GB	619488-B21	Numerous HP ProLiant G6 and G7 servers

### Front view

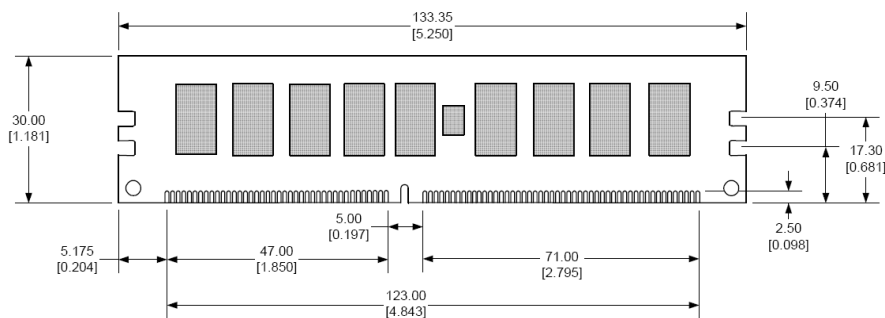


### Notes

Tolerances on all dimensions except where otherwise indicated are  $\pm$ 0.13 (.005).

All dimensions are expressed in millimeters [inches]

### Back view

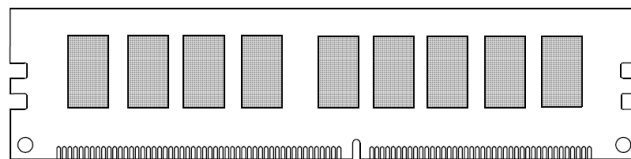

### Side view

